


Motion detector, Niko Home Control, 8 m, 180°, wall detector, for flush-mounting box

550-20211


4 year warranty

This motion detector is suitable for indoor use and can be used as a motion detector or as a motion detector in combination with a photo cell. With one push of the button, you can also manually switch the light on and off. The motion detector is supplied with power via the Niko Home Control installation.


This article is protected by at least one patent (application). For more info on patents, see www.niko.eu/innovation.

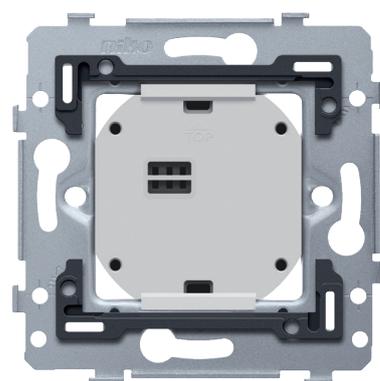

Detection range



| H | A Across | B Towards |
|-------|-------------|--------------|
| 0.8 m | 7 m | 2.4 m |
| 1 m | 8 m | 3 m |
| 1.2 m | 9 m | 4 m |

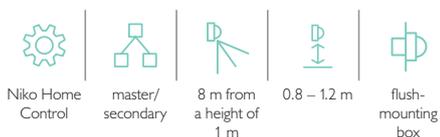

niko

Technical data

| | |
|------------------------------|---|
| Article number | 550-20211 |
| Input voltage | 26 Vdc (SELV, safety extra-low voltage) |
| Detector output | 26 V |
| Light intensity range | 10 lux – 1000 lux |
| Detection range (PIR) | 8 m from a height of 1 m |
| Mounting method | flush-mounting box |
| Mounting height | 0.8 – 1.2 m |
| Minimum flush-mounting depth | 16.2 mm |
| Dimensions (HxWxD) | 73.2 x 73 x 20.2 mm |
| Wire capacity | 0.5 or 1 mm ² |
| Protection degree | IP20 |
| Protection degree | IP40 for the combination of a mechanism and faceplate |
| Marking | CE |