

# External video unit for Niko Home Control, with 1 illuminated touch button

550-22001

4 year warranty

This ultra-flat external video unit for flush mounting is finished with a black front plate made of anodised aluminium (3 mm thick). The device is equipped with a 130° HD colour camera and a Plexiglass name plate that can be engraved. The touch button requires no maintenance and is extremely durable. The external video unit is supplied with a flush-mounting box. This external unit has 1 illuminated touch button. This unique lighting concept (patent pending) provides refined and homogeneous illumination of the engraved nameplate, guaranteeing good visibility in the dark. Combined with touchscreen 3 (or a smartphone or tablet) as an internal video unit, access control can be integrated into a Niko Home Control installation via the external video unit.

If you want to receive incoming calls via the Niko Home app on a tablet, contact your tablet vendor to ensure that your tablet meets the following minimum requirements:

- It has speakers and a microphone
- It supports telephony
- In case of an Android device, it operates on version 9 or higher

Please note: we recommend providing at least one touchscreen 3 on top of the smartphones and/or tablets, because a wired device is always more reliable than a mobile one.

This article is protected by at least one patent (application). For more info on patents, see [www.niko.eu/innovation](http://www.niko.eu/innovation).



## Technical data

External video unit for Niko Home Control, with 1 illuminated touch button.


- Function: • each non-programmed push button can operate the light, light symbol supplied
- Acknowledgement tone when pressing the bell button
- material push buttons: metal with gilded, maintenance-free contacts
- long-life energy-saving name plate lighting
- 5 mm thick, indestructible and vandal proof name place in Plexiglass
- internal memory for the exchange of data between identical external units (EEPROM)
- Dimensions front plate: 256 x 110 x 3 mm (HxWxD)
- Dimensions flush-mounting box: 239 x 89 x 47 mm (HxWxD)
  - 5 MP HD colour camera
  - Light sensitivity camera: 1 lux
  - Camera angle: 130°
- Wiring technique: IP wiring
- Thickness of front plate: 3 mm aluminium
- Finishing colour: black
- Protection degree: IP53
- Marking: CE

**niko**

550-22001 - 24-04-2024



## Dimensions

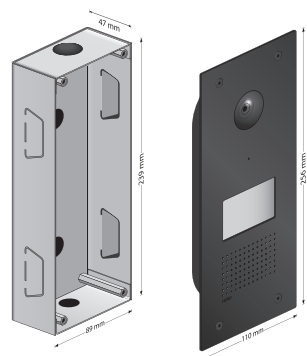

## Wiring diagram

