

Movement detector 360°, 24 Vdc, for flush-mounting in the ceiling, white

350-20061

4 year warranty

This movement detector is designed to be flush mounted in the ceiling and is used to switch indoor lighting on and off. The detector has a circular detection range with a diameter of up to 12 m and is used in combination with the daylight control modules, 360-35010, 360-45010 or 360-45011. The device has an IP20 protection degree and conforms to the European directive, EN 60669-2-1, for EMC and safety. Finishing colour: white.


- Sustainable
- Functional
- Elegant
- Simple installation
- Can be combined with Niko Home Control

Presence detector for use in small rooms, offices, storage rooms, etc.

- To be used in combination with a daylight control module (360-35010, 360-45010 or 360-45012) for the indoor lighting control.
- Depending on the application chosen, the lighting is turned on and off manually using a push button or automatically when motion is detected.
- The lighting remains on while motion is detected.
- Connection possible to Niko Home Control via the potential-free digital sensor module (550-00210).
- In large premises, you can connect several detectors in parallel.



Detection range



2,5 m	3,5 m	4 m	7 m
3 m	4 m	4,5 m	8 m
3,5 m	4 m	6 m	10 m
4 m	4 m	7 m	12 m



24V



master



360 °



ø 12 m from a height of 3 m



2.5 – 4 m



flush-mounting

niko


Technical data

Article number	350-20061
Configuration	master
Input voltage	24 Vdc \pm 10 %
Detector output	24 V (ON/OFF)
Relay contact	on/off (NPN transistor), motion-sensitive
Number of channels	1 channel
Detection angle	360 °
Detection range (PIR)	ø 12 m from a height of 3 m
Ambient temperature	-5 – +50 °C
Mounting method	flush-mounting
Mounting height	2.5 – 4 m
Dimensions (HxWxD)	90 x 90 x 24 mm
Protection degree	IP20
Marking	CE

Accessories

390-20056	Mounting box for 360° presence detector, for surface mounting
-----------	---

Dimensions

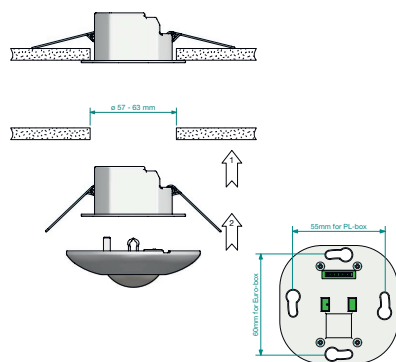

Wiring diagram

